


Packaged Terminal Air Conditioner for Replacement

RSK Series

Ice Air's RSK Series Replacement and Retrofit units are high energy efficiency PTACs. Designed from the ground up for ultra-high efficiency, they incorporate advanced LEEDs features in a durable and user-friendly package.

Features:

- Ultra-high efficiency – EERs to 9.5
- Advanced tangential indoor blower provides balanced air flow
- Whisper quiet sound levels
- Standard programmable digital touchpad controls
- 5/2 or 7 day programming
- Heavy duty, commercial-grade construction throughout
- G90 galvanized steel construction, powder-coated drain and base pans
- Furniture-grade, powder-coated cabinetry

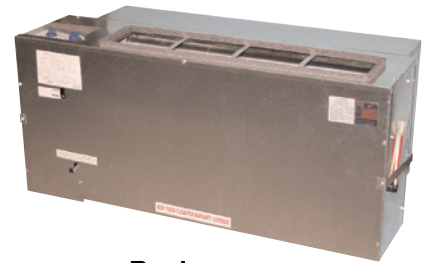

Replaces:

Ice-Cap – RSK
 Islandaire – RK
 Retroaire – RC/RH22

SERIES MODEL #	5RSK09	5RSK13	8RSK13	8RSK18
Cooling Capacity ¹ (BTU/h)	9,600	12,400	12,800	17,400
EER	10.4	10.3	9.7	9.2
Heating Capacity - Hot Water ² (BTU/h)	16,500	16,500	16,500	19,400
Heating Capacity - Steam ³ (BTU/h)	18,700	18,700	18,700	20,200
Electric Heating MAX (kW)	1.5	1.5	4.3	4.3
Voltage	115	115	208/230	208/230
Amperage	8.0	10.5	6.3	9.1
Watts	923	1204	1320	1891
Airflow AC High Speed (CFM)	350	400	450	450
Airflow AC Low Speed (CFM)	260	350	350	370
Airflow Outside ⁴ (CFM)	60	60	60	60
Airflow Extra Outside (CFM)	110	110	110	110
Weight Net/Ship (lbs)	117/133	117/133	117/133	141/157

SPECIFICATION NOTES:

1. Cooling mode performance ratings are in compliance with AHRI standard 310/380 and CSA standard 744.
2. BTUH @ 200 °F. E.W.T.; 65 °F. E.A.T. & 2 G.P.M. flow rate.
3. BTUH @ 2 PSIG STEAM & 65 °F. E.A.T.
4. Optional full time fresh air (OAM).
5. Performance data based on R32 green refrigerant.

IMPORTANT: Additional voltages and alternate electric heat and heat pump options are available. For performance data and other available options please consult factory. Accessories are optional. Deviations from standard accessories may affect performance; louver requires 70% free area per original OEM specification; room enclosures must provide sufficient return air, free flowing supply air and must be properly sealed to prevent air recirculation; any non-standard components or accessories must be reviewed and approved by Ice Air or approved distributor.